
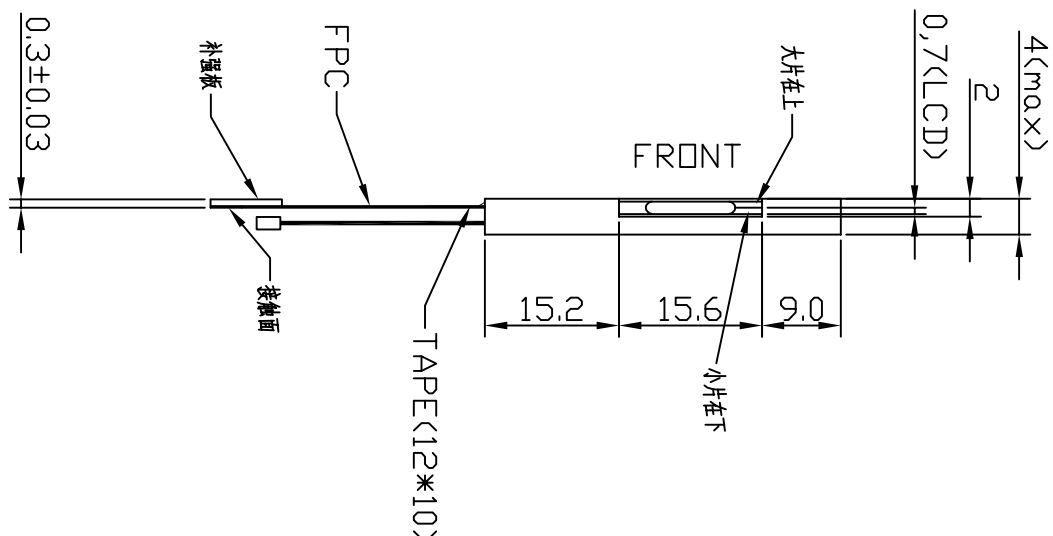


客户确认签字:


REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
------	-----	-------------	------	----------

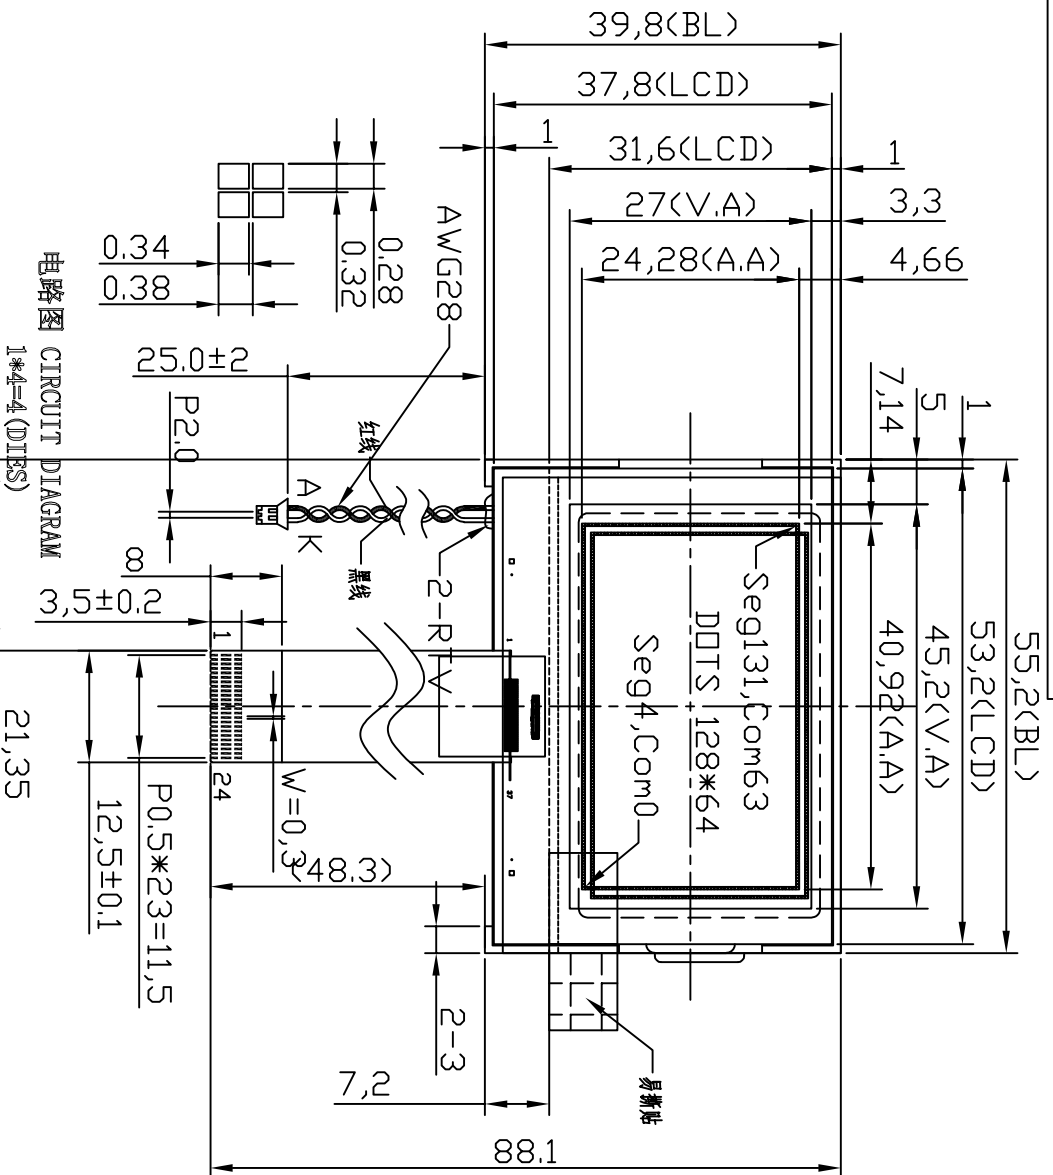

1	NC
2	/CS1
3	/RES
4	A0
5	/WR
6	/RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	VDD
16	VSS
17	VSS
18	V0
19	XV0
20	VM
21	VG
22	C86
23	P/S
24	NC

电路图 CIRCUIT DIAGRAM
1*4=4(DIES)

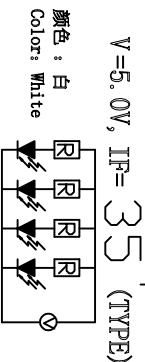

White LED, V_f=3.2V(I_f=50~60mA) TYPE

V=5.0V, I_P=35 (TYPE)
颜色: 白
Color: White

根据样品修正如下:
1、大小片玻璃胶位置修正为大片在上;
2、修正背光输入5V 实测电流为35mA;
20181219 XIAHANG

The non-specified tolerance of dimension is ±0.3mm.

HZY Display CO., 9

1. DISPLAY TYPE:	FSTN,Positive	5. DRIVE METHOD:	1/65D,1/9B
2. POLARIZER MODE:	TRANSFLECTIVE	6. OPERATING TEMP:	-20°C ~ 70°C
3. VIEWING DIRECTION:	6 O'clock	7. STORAGE TEMP:	-30°C ~ 80°C
4. OPERATING VOLTAGE:	VDD3.0V /VOP 9V	8. CONNECTOR:	ST7567/COG

DRAWNBY:	Villain	LCM NO:	HO12864U-WFH-00
CHECKEDBY:	Villain	UNITS:	MM
APPROVED BY:	Villain	DATE:	2018-10-20
CUSTOMER NO:		1 OF 1	