


DOTS: 240X160

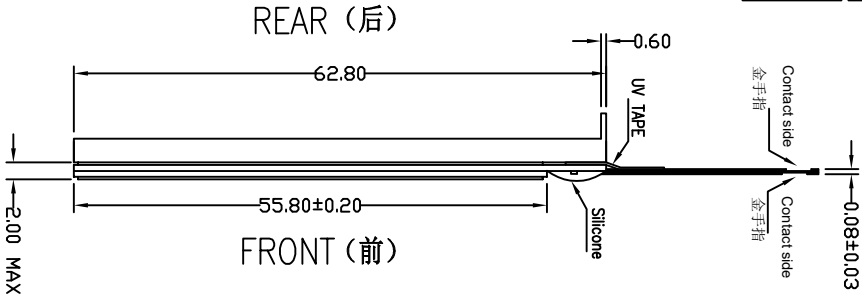

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13
SYMBOL	ESD	VG	XV0	V0	VM	VDD	VSS	VD1	CSB	IF3	IF2	IF1	RST
PIN NO.	14	15	16	17	18	19	20	21	22	23	24	25	
SYMBOL	E/RD	D7	D6	D5	D4	D3	D2	D1	D0	RW/WR	A0	ESD	

DISPLAY TYPE: FSTN/POSITIVE
 POLARIZER: TRANSMISSIVE
 VIEWING DIRECTION: 12H
 DRIVE METHOD: 1/160DUTY, 1/14BIAS
 LCD OPERATING VOLTAGE: 16.5V
 LCM OPERATING VOLTAGE: 3.0V
 OPERATING TEMP: -20 TO 70 Deg.C
 STORAGE TEMP: -30 TO 80 Deg.C
 CONNECTOR: COG
 UNSIGNED TOLERANCE: ±0.20
 Backlight: White LED (VF=3.0V)

SCALE:	1/1	REV:	A	HZY DISPLAY, CD M-DEL HO240160A-WF1-00 TITLE LCM DRAWING DWG NO.
UNTT:	mm	PAGE:	1/1	
APPROVE		CHECK		
DRAW				