


ROSH

Revision	Description	Date	Signed
01	First	2021.06.18	YangPei

FPC INTERFACE

1	WLED-
2	WLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSTXNC
33	VSTXNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

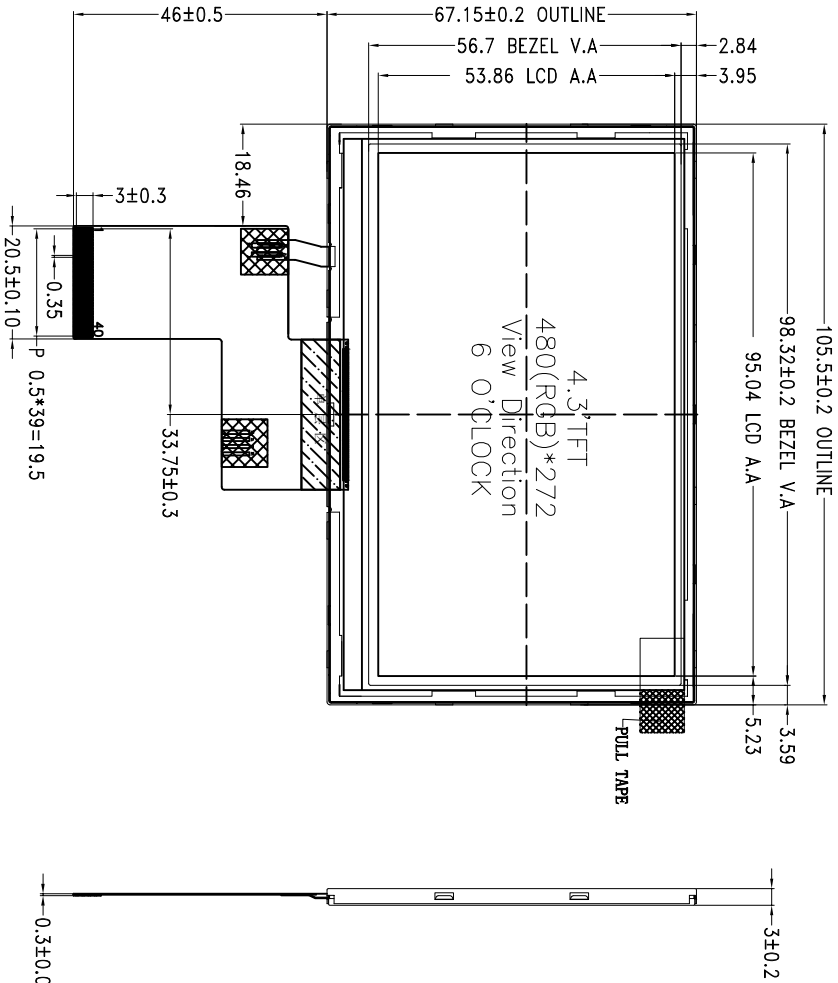

VF=21.7±0.3V;IF=20mA  
LED CIRCUIT DIAGRAM

- NOTES:
1. DISPLAY TYPE: 4.3" TFT, TRANSMISSIVE
  2. DRIVER IC: NV3047E
  3. VIEWING DIRECTION: 6 O'CLOCK
  4. BACKLIGHT: 7 pcs White LED
  5. INPUT CURRENT: VCC 3.3V (type)
  6. OPERATING TEMP: -20°C ~ +70°C
  7. STORAGE TEMP: -30°C ~ +80°C
  8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
  9. ROHS COMPLIABLY

深圳市华之洋光电科技有限公司  
Shenzhen HZY Photoelectric Technology Co., Ltd

Customer Ref.	Model No.	Drawing Title	Unmarked Tolerance	Unit	Scale	Page
---	Approve	HZ043ZTCX01-A0	±0.2	mm	---	1 of 1
Part No.	Material	Material	Tolerance	Unit	Scale	Page
---	Checked	LCM	±0.2	mm	---	1 of 1
Drawing No.	Draw	Date	Rev	00		
---	YP	2021.06.18	Rev	00		